


## XN6G - Technical Data Sheet

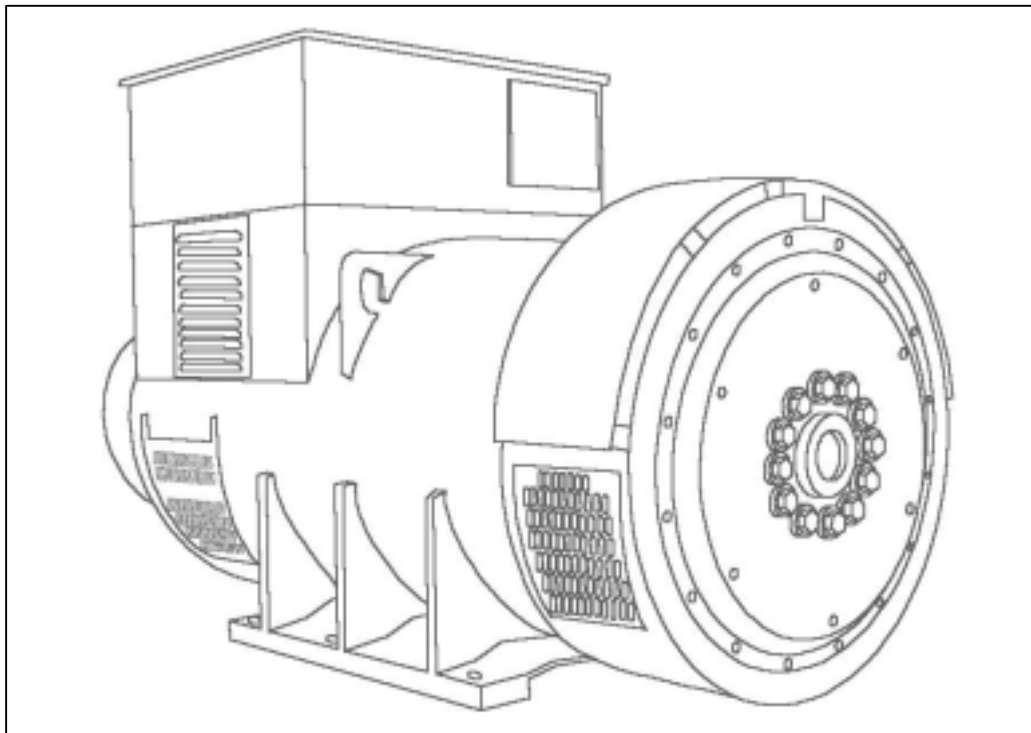

# XN6G

## SPECIFICATIONS & OPTIONS

### STANDARDS

Xingnuo industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

### VOLTAGE REGULATORS

#### MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

#### MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

### WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

### TERMINALS & TERMINAL BOX

Standard generators feature a main stator with 6 ends brought out to the terminals, which are mounted on the frame at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

### SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

### INSULATION/IMPREGNATION

The insulation system is class 'H'. All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

### QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

*NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.*

*Front cover drawing typical of product range.*

# XN6G





## WINDING 312

CONTROL SYSTEM SER.3	SEPARATELY EXCITED BY P.M.G.							
A.V.R.	MX341	MX321						
VOLTAGE REGULATION	± 1.0 %	± 0.5 %	With 4% Engine Governing					
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7)							
INSULATION SYSTEM	CLASS H							
PROTECTION	IP23							
RATED POWER FACTOR	0.8							
STATOR WINDING	DOUBLE LAYER LAP							
WINDING PITCH	TWO THIRDS							
WINDING LEADS	6							
STATOR WDG. RESISTANCE (L-L)	0.0015 Ohms PER PHASE AT 22°C STAR CONNECTED							
ROTOR WDG. RESISTANCE	2.45 Ohms at 22°C							
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. refer to factory for others							
WAVEFORM DISTORTION	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
MAXIMUM OVERSPEED	2250 Rev/Min							
BEARING DRIVE END	BALL. 6228 (ISO)							
BEARING NON-DRIVE END	BALL. 6319 (ISO)							
	1 BEARING				2 BEARING			
WEIGHT COMP. GENERATOR	2658 kg				2840 kg			
WEIGHT WOUND STATOR	1350 kg				1350 kg			
WEIGHT WOUND ROTOR	1167 kg				1129 kg			
WR <sup>2</sup> INERTIA	29.279 kgm <sup>2</sup>				28.7543 kgm <sup>2</sup>			
SHIPPING WEIGHTS in a crate	3054 kg				3130 kg			
PACKING CRATE SIZE	194 x 105 x 154 (cm)				194 x 105 x 154 (cm)			
	50 Hz				60 Hz			
TELEPHONE INTERFERENCE	THF<2%				TIF<50			
COOLING AIR	2.18 m <sup>3</sup> /sec 4619 cfm				2.63 m <sup>3</sup> /sec 5573 cfm			
VOLTAGE STAR (Y)	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
kVA BASE RATING FOR REACTANCE VALUES	1190	1250	1250	1135	1310	1386	1449	1513
X <sub>d</sub> DIR. AXIS SYNCHRONOUS	2.16	2.05	1.90	1.54	2.47	2.33	2.23	2.14
X' <sub>d</sub> DIR. AXIS TRANSIENT	0.12	0.11	0.10	0.08	0.13	0.13	0.12	0.12
X'' <sub>d</sub> DIR. AXIS SUBTRANSIENT	0.09	0.08	0.08	0.06	0.10	0.09	0.09	0.08
X <sub>q</sub> QUAD. AXIS REACTANCE	1.79	1.70	1.58	1.28	2.04	1.93	1.85	1.77
X'' <sub>q</sub> QUAD. AXIS SUBTRANSIENT	0.21	0.20	0.18	0.15	0.23	0.22	0.21	0.20
X <sub>L</sub> LEAKAGE REACTANCE	0.07	0.06	0.06	0.05	0.07	0.07	0.07	0.07
X <sub>2</sub> NEGATIVE SEQUENCE	0.15	0.14	0.13	0.11	0.17	0.16	0.15	0.15
X <sub>0</sub> ZERO SEQUENCE	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
REACTANCES ARE SATURATED				VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED				
T' <sub>d</sub> TRANSIENT TIME CONST.	0.115 s							
T'' <sub>d</sub> SUB-TRANSTIME CONST.	0.015 s							
T' <sub>do</sub> O.C. FIELD TIME CONST.	3.6 s							
T <sub>a</sub> ARMATURE TIME CONST.	0.038 s							
SHORT CIRCUIT RATIO	1/X <sub>d</sub>							

**50  
Hz**

**XN6G  
Winding 312**





**THREE PHASE EFFICIENCY CURVES**

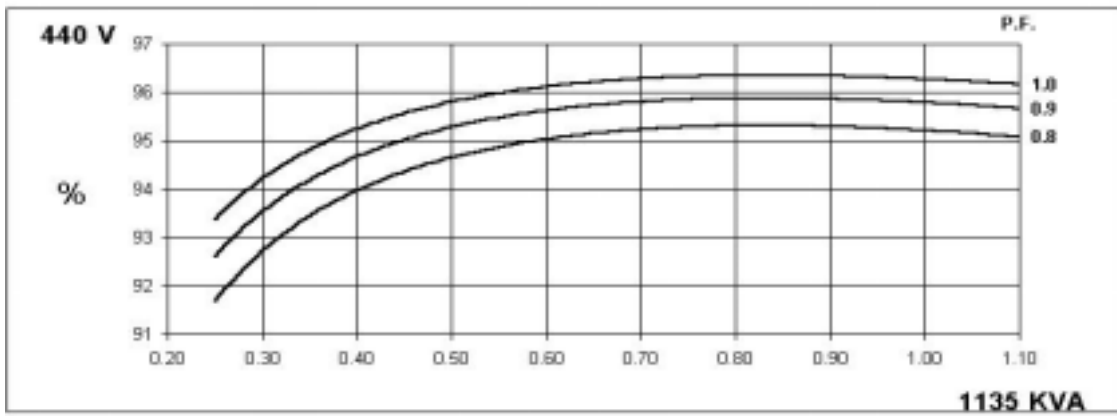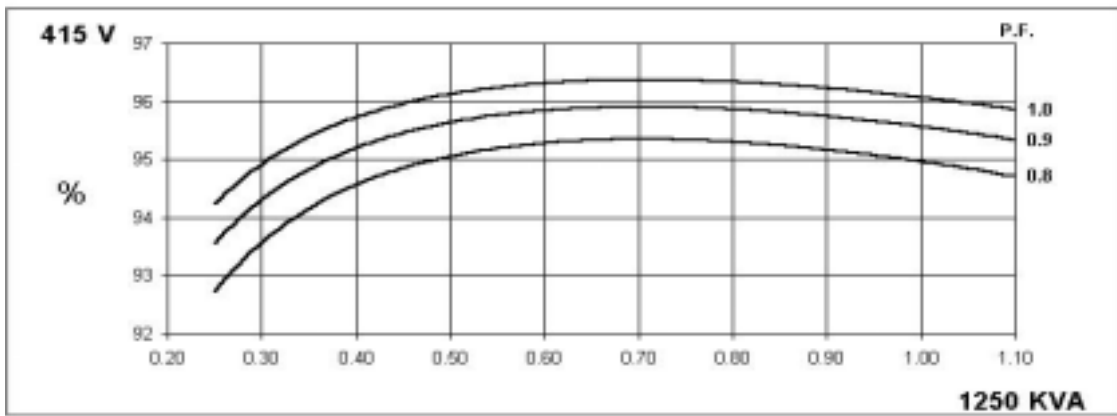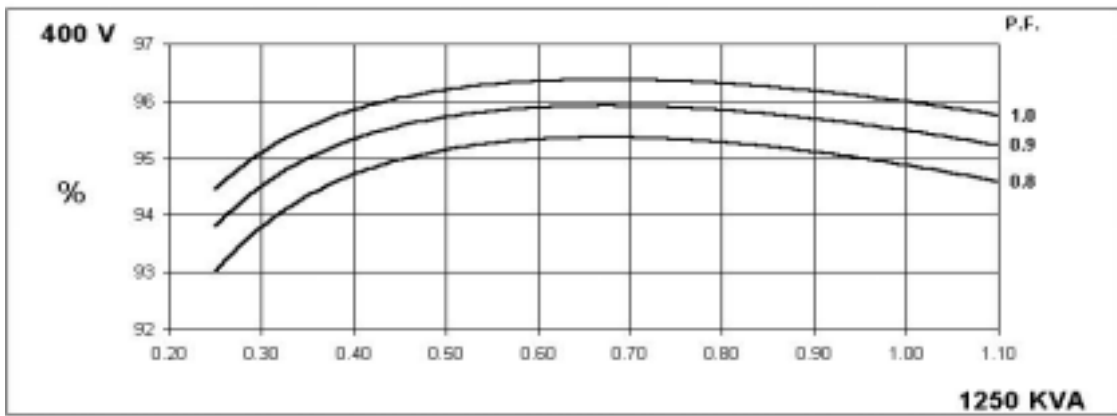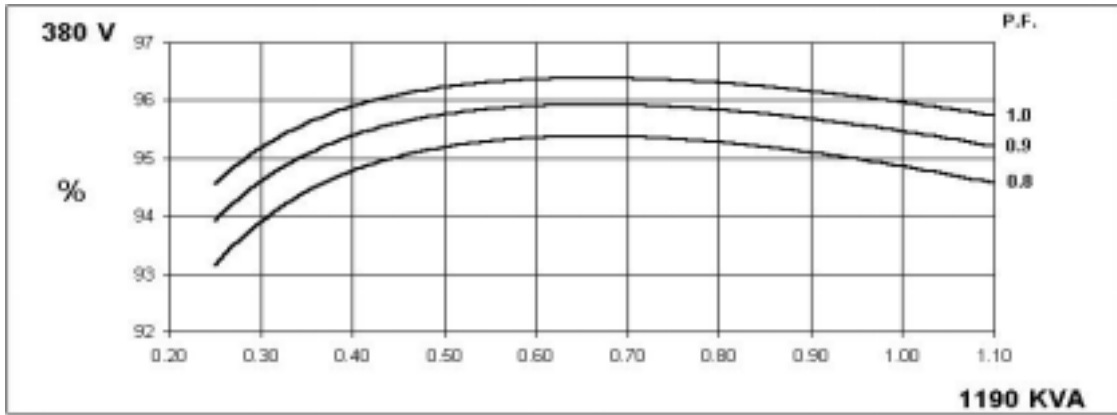

**XN6G**  
**Winding 312**


**60**  
**Hz**

**THREE PHASE EFFICIENCY CURVES**

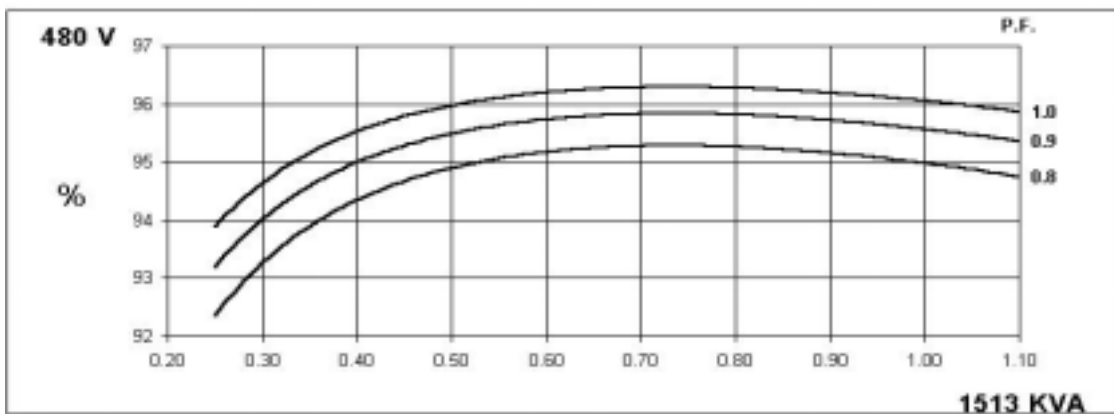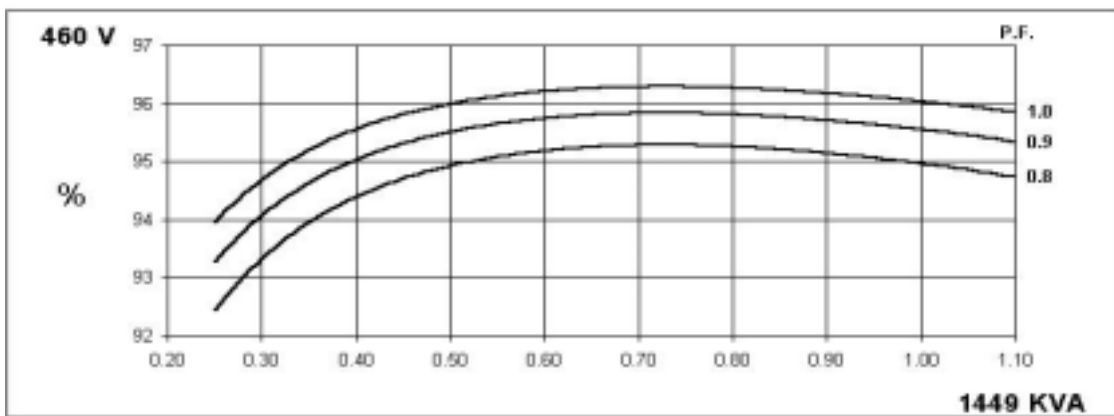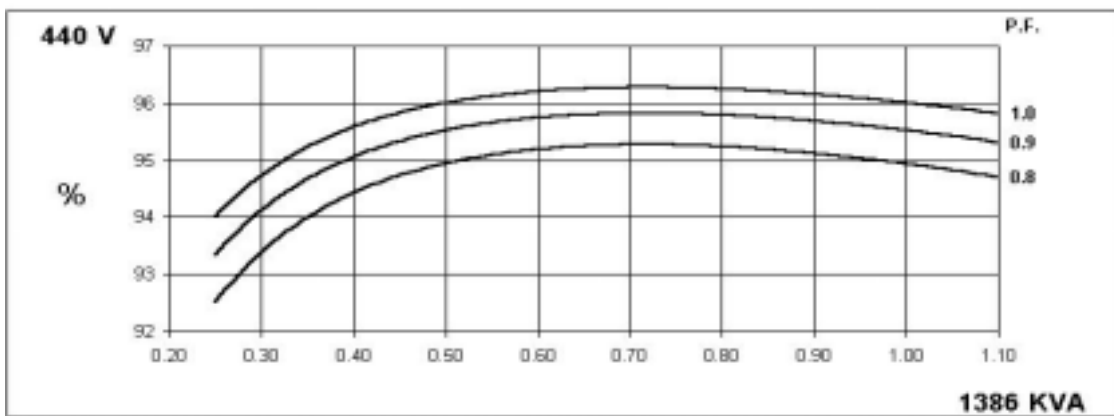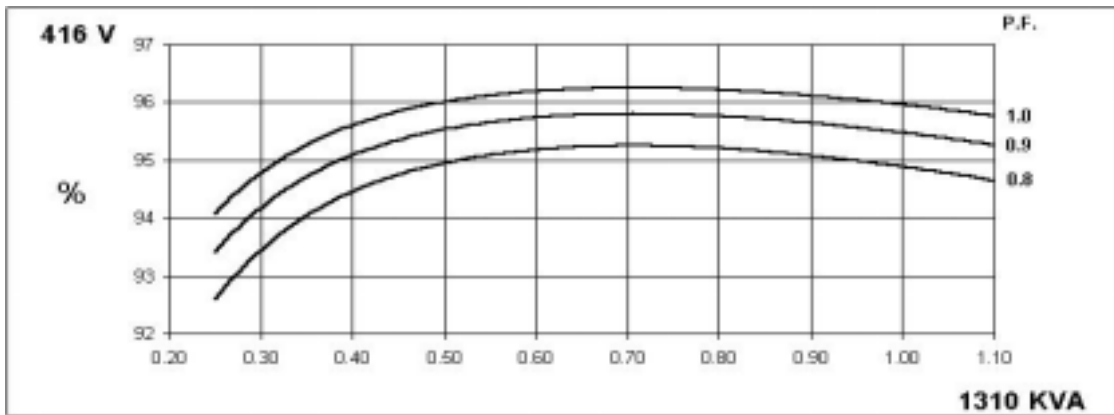


**XN6G**  
**Winding 312**

**Locked Rotor Motor Starting Curve**

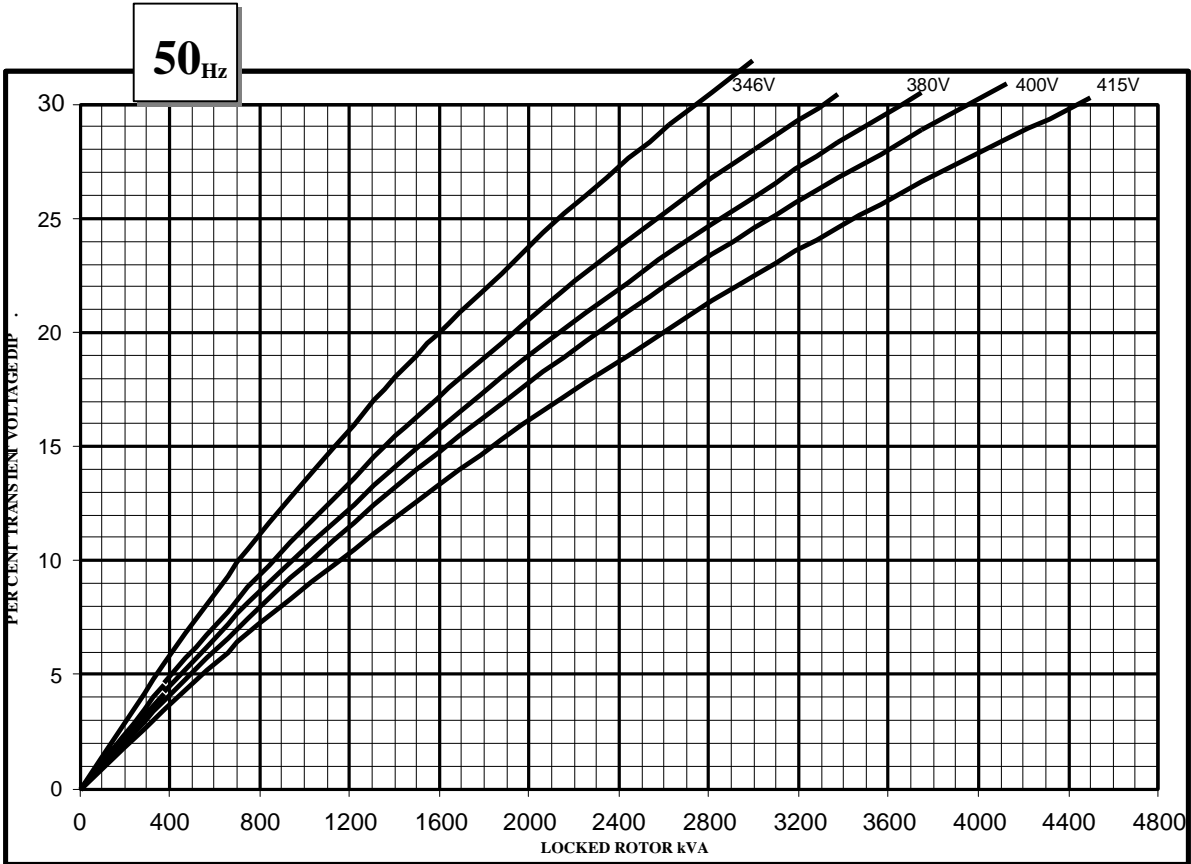


440V

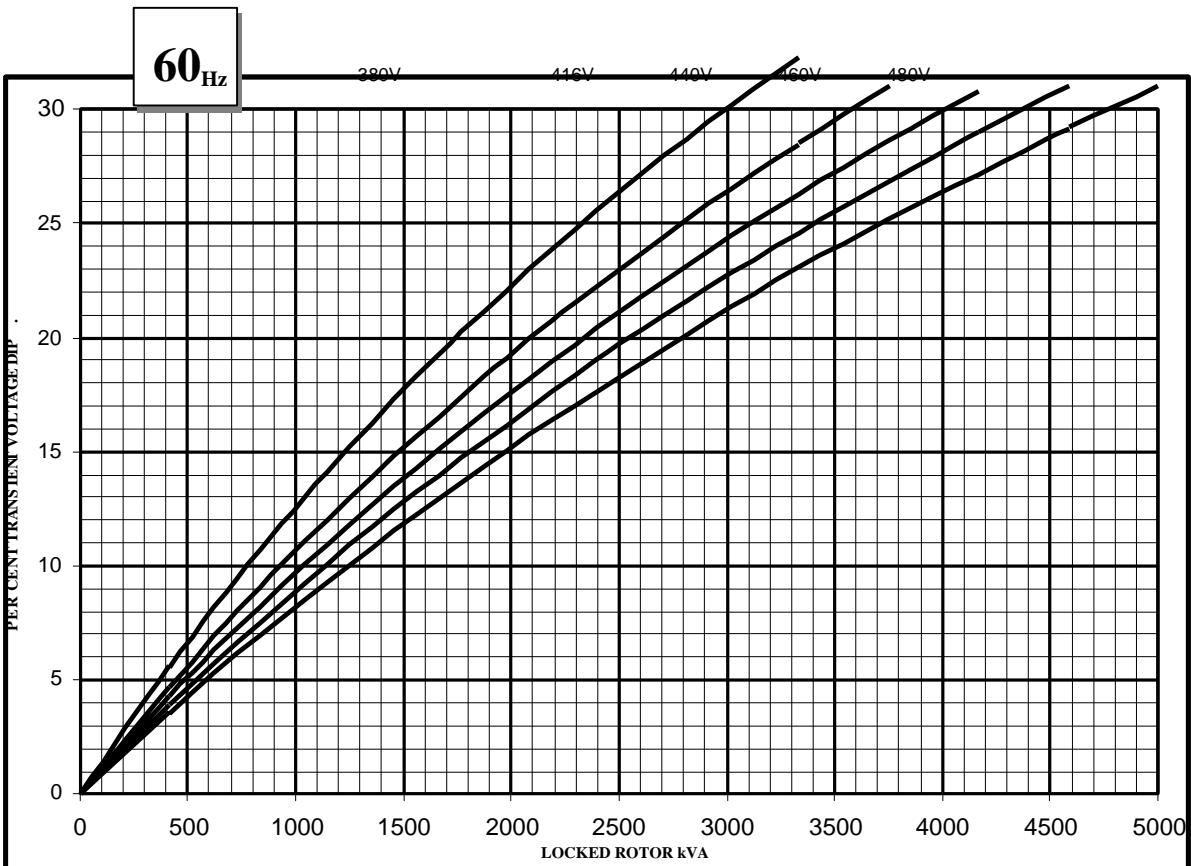

# XN6G


## Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

**50  
Hz**

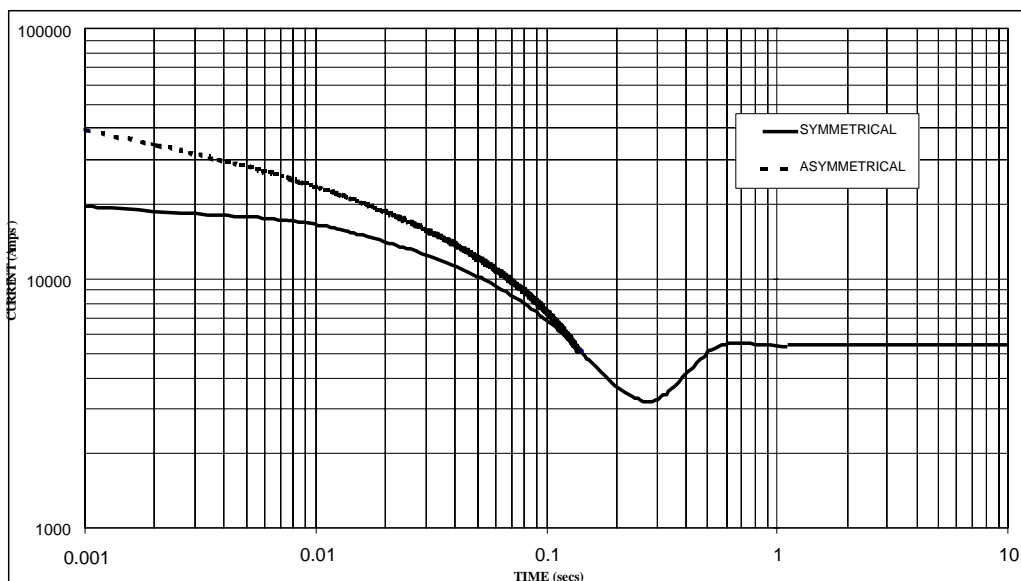

Sustained Short Circuit = 5,400 Amps

**60  
Hz**

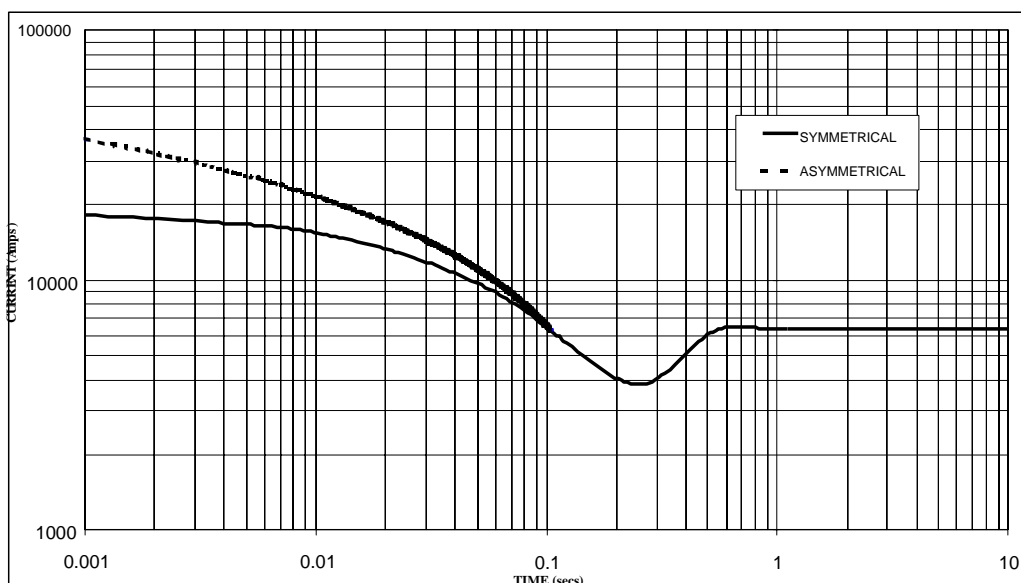

Sustained Short Circuit = 6,390 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.05	440v	X 1.06
415v	X 1.09	460v	X 1.10
440v	X 1.16	480v	X 1.15

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

**Note 3**

Curves are drawn for Star (Wye) connected machines.

# XN6G


## Winding 312 / 0.8 Power Factor

### RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
<b>50 Hz</b>	Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	1091	1146	1146	1040	1190	1250	1250	1135	1225	1288	1288	1170	1250	1313	1313	1190
	kW	873	917	917	832	952	1000	1000	908	980	1030	1030	936	1000	1050	1050	952
	Efficiency (%)	95.1	95.1	95.1	95.3	94.9	94.9	95.0	95.2	94.8	94.8	94.9	95.2	94.7	94.7	94.8	95.2
	kW Input	918	964	964	873	1003	1054	1053	954	1034	1087	1086	983	1056	1109	1108	1000

<b>60 Hz</b>	Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	200	1270	1328	1386	1310	1386	1449	1513	1354	1432	1497	1563	1369	1448	1514	1580
	kW	960	1016	1062	1109	1048	1109	1159	1210	1083	1146	1198	1250	1095	1158	1211	1264
	Efficiency (%)	95.1	95.1	95.1	95.1	94.9	94.9	95.0	95.0	94.8	94.9	94.9	94.9	94.8	94.8	94.9	94.9
	kW Input	1009	1068	1117	1166	1104	1168	1220	1274	1143	1207	1262	1318	1155	1222	1276	1332

### DIMENSIONS

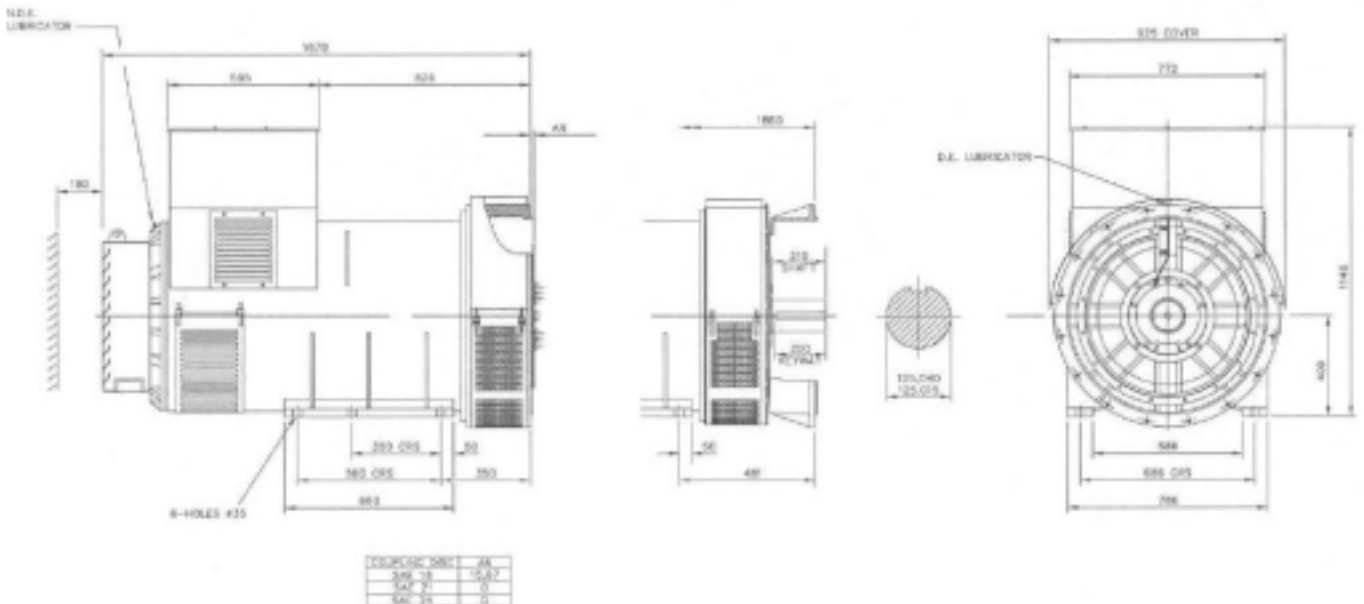

Add: LuoShe Town, Wuxi, P.R.China  
 Tel: 0510-83311285 83315170 • Fax: 0510-83303017  
[Http://www.wxingnuo.cn/](http://www.wxingnuo.cn/)