

TECHNICAL DATA SHEET



ALTERNATOR PRO40S B/4

Three-Phase brushless synchronous alternator with AVR - 4 poles

PRO40S B/4

COMMON DATA

Rated Power at 50Hz	kVA	1050	
Rated Power at 60Hz	kVA	1260	
Rated Power Factor		0,8	
Nominal Temperature	°C	40	
Control System		self-excited	
Execution		brushless	
Regulation Type		AVR	
Insulation Class		H	
Protection		IP23	
Maximum Over speed	rpm	2250	
Overload		110% of rated power for one hour in a cycle of 6 hours	
Air Flow Requirement	m ³ /min	94 at 50Hz	113 at 60Hz
R.F.I. Suppression		Standard EN55011	

REGULATION DATA

AVR		HVR30
Sensing		three-phase
Voltage Regulation		±1%
Sustained Short Circuit		> 300% of rated current

WINDING DATA

Stator Winding		Double layer with auxiliary winding	
Rotor Winding		with damping cage	
Winding Pitch		2/3	
Number of Leads of Stator		6*	
Stator Winding Resistance	Ω	0,00895 at 20°C	
Rotor Winding Resistance	Ω	0,687 at 20°C	
Exciter Stator Resistance	Ω	13,3 at 20°C	
Exciter Rotor Resistance	Ω	0,051 at 20°C	
THD at full load		<3%	
THD at no load		<3%	
Excitation at no load	Adc	0,71	
Excitation at full load	Adc	2,98	

Note (*): 230/400V - 460/800V 50Hz
277/480V - 554/960V 60Hz

STANDARD

References		EN60034-1 ISO8528-3 EN55011
------------	--	-----------------------------

PRO40S B/4

ELECTRICAL DATA

Frequency		50Hz - 1500rpm				60Hz - 1800rpm			
Voltage Series Star	V	380/220	400/230	415/240	440/254	415/240	440/254	460/266	480/277
Rated Power in Class H (125°C/40°C)	kVA	1050	1050	1050	1010	1100	1200	1260	1260
	kW	840	840	840	808	880	960	1008	1008
Rated Power in Class F (105°C/40°C)	kVA	980	980	980	940	1020	1120	1176	1176
	kW	784	784	784	752	816	896	940,8	940,8
Rated Power Standby (150°C/40°C)	kVA	1140	1140	1140	1100	1130	1280	1370	1370
	kW	912	912	912	880	904	1024	1096	1096
Rated Power Standby (163°C/27°C)	kVA	1180	1180	1180	1110	1200	1320	1416	1416
	kW	944	944	944	888	960	1056	1132,8	1132,8

EFFICIENCY IN CL. H

4/4		95,6%						96,3%
3/4		95,8%						96,5%
2/4		95,4%						96,1%
1/4		92,7%						93,9%

REACTANCES AND TIME CONSTANTS

pcc		0,31							
X _d	- dir. axis synchronous	325%	294%	273%	233%	343%	333%	320%	294%
X' _d	- dir. axis transient	35,0%	31,6%	29,4%	25,1%	36,9%	35,8%	34,4%	31,6%
X'' _d	- dir. axis subtransient	15,0%	13,5%	12,5%	10,7%	15,8%	15,3%	14,7%	13,5%
X _q	- quad. axis reactance	173%	156%	145%	124%	182%	176%	170%	156%
T' _{do}	- O.C. field time constant	1773ms							
T' _d	- Transient time constant	190ms							
T'' _d	- Sub-transient time constant	19ms							

MECHANICAL DATA


Bearing non drive end	6318-2RS1-C3		
Bearing drive end (B3/B14 form)	6324-C3		
Weight of generator	in B2	kg	2045
	in B3/B14	kg	2100

PRO40S B/4


MOMENT OF INERZIA

SAE 14	kg·m ²	17,824
SAE 18	kg·m ²	18,217
SAE 21	kg·m ²	18,867
B3/B14	kg·m ²	16,617

DERATING CURVES

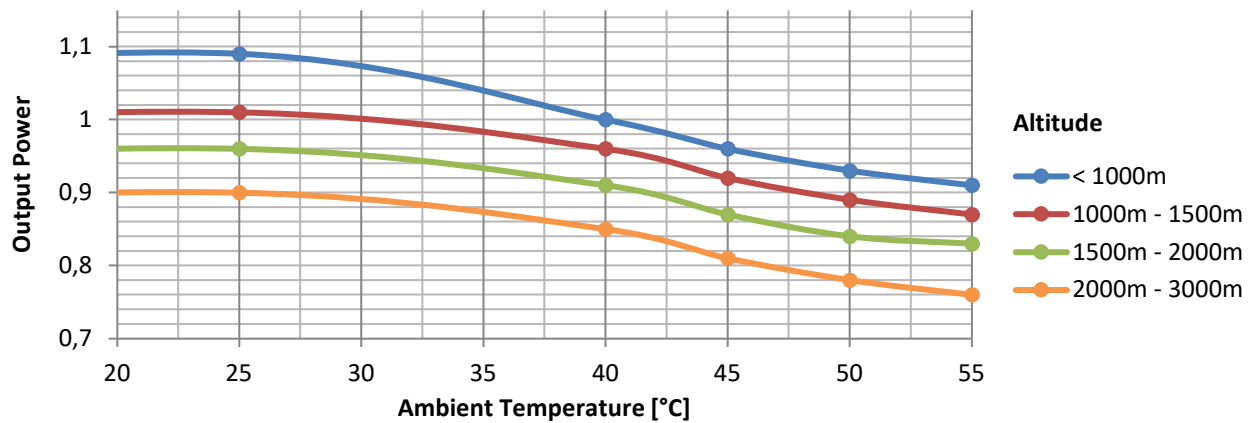


WIRING DIAGRAM

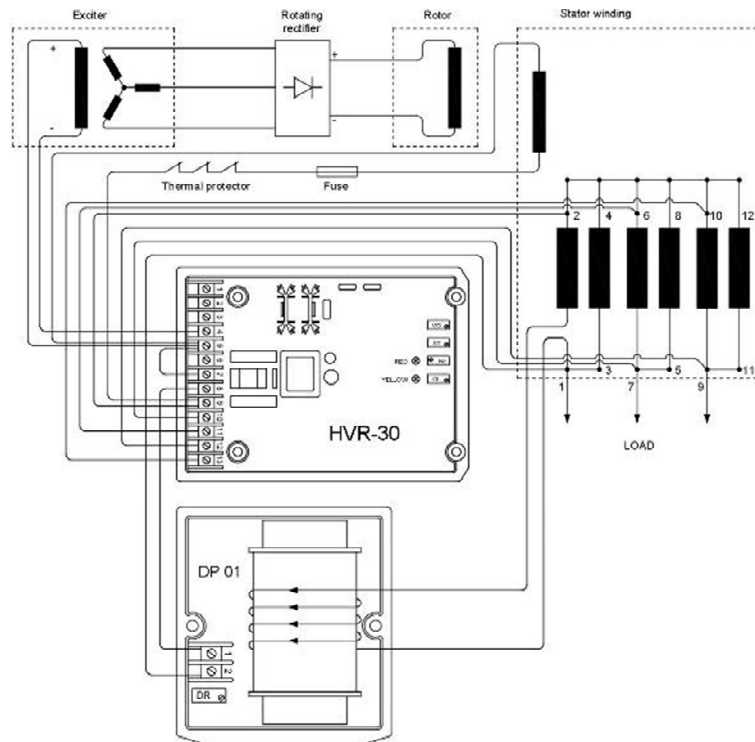

PRO40S B/4


TRANSIENT VOLTAGE VARIATION 50Hz

Transient Voltage Variation @ 50Hz

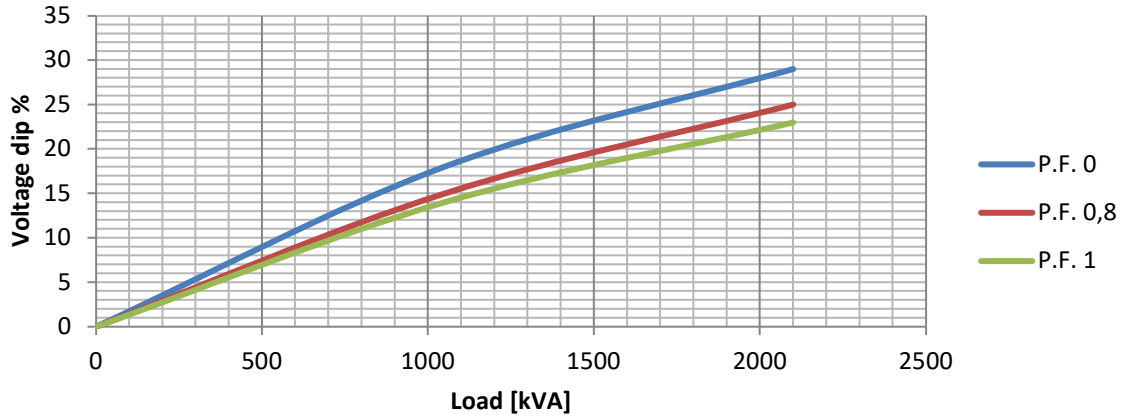

TRANSIENT VOLTAGE VARIATION 60Hz


Transient Voltage Variation @ 60Hz

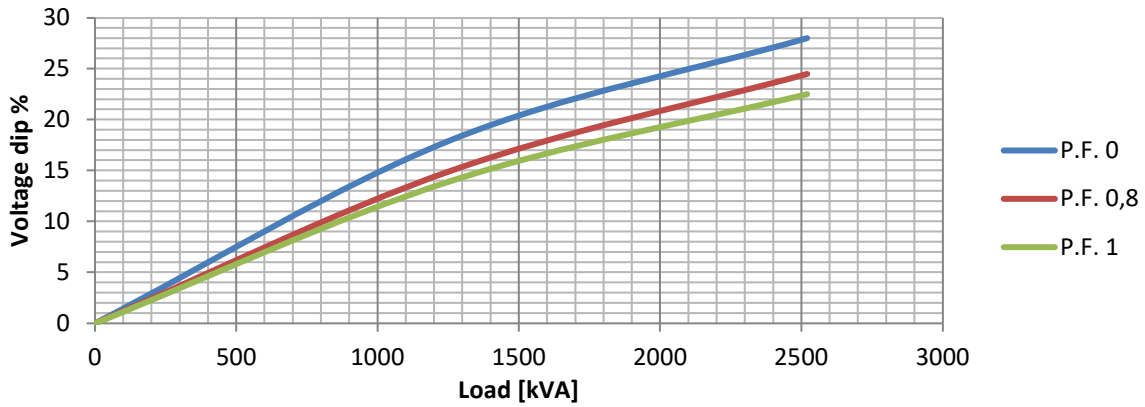

PRO40S B/4


EFFICIENCY 50Hz

Efficiency Curves @ 50Hz

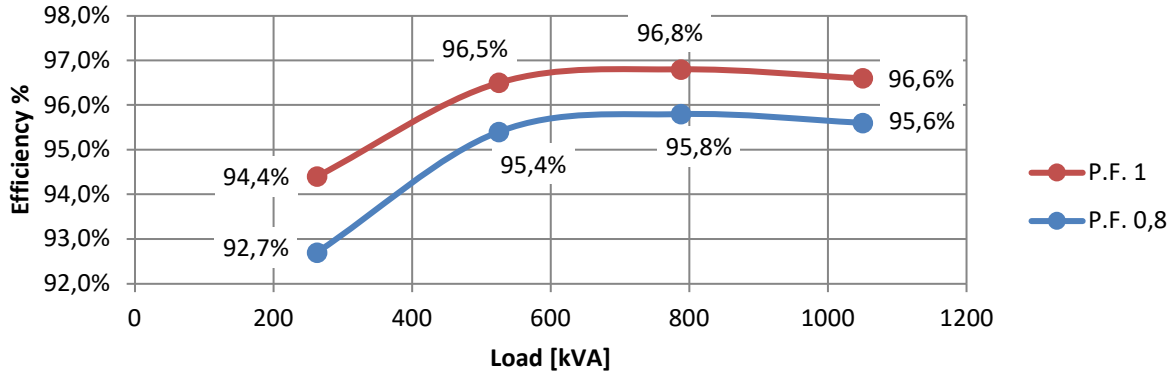


EFFICIENCY 60Hz

Efficiency Curves @ 60Hz

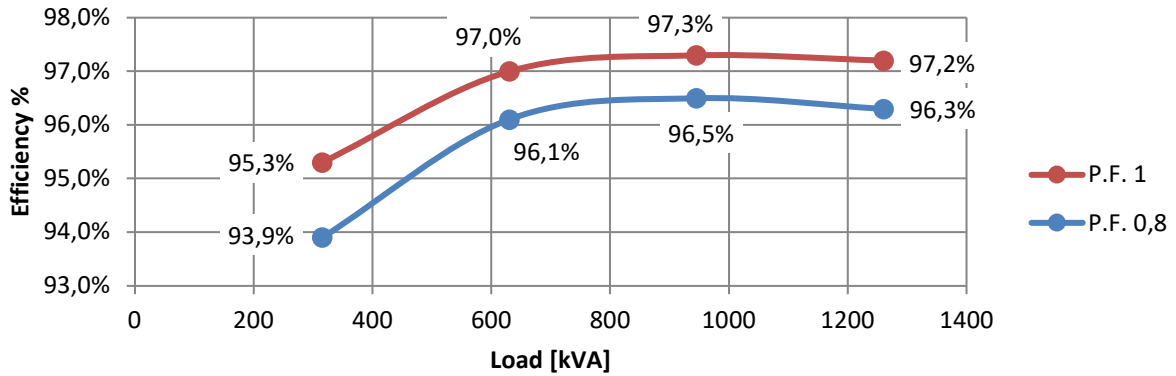


PRO40S B/4

FORMA - FORM B3/B14

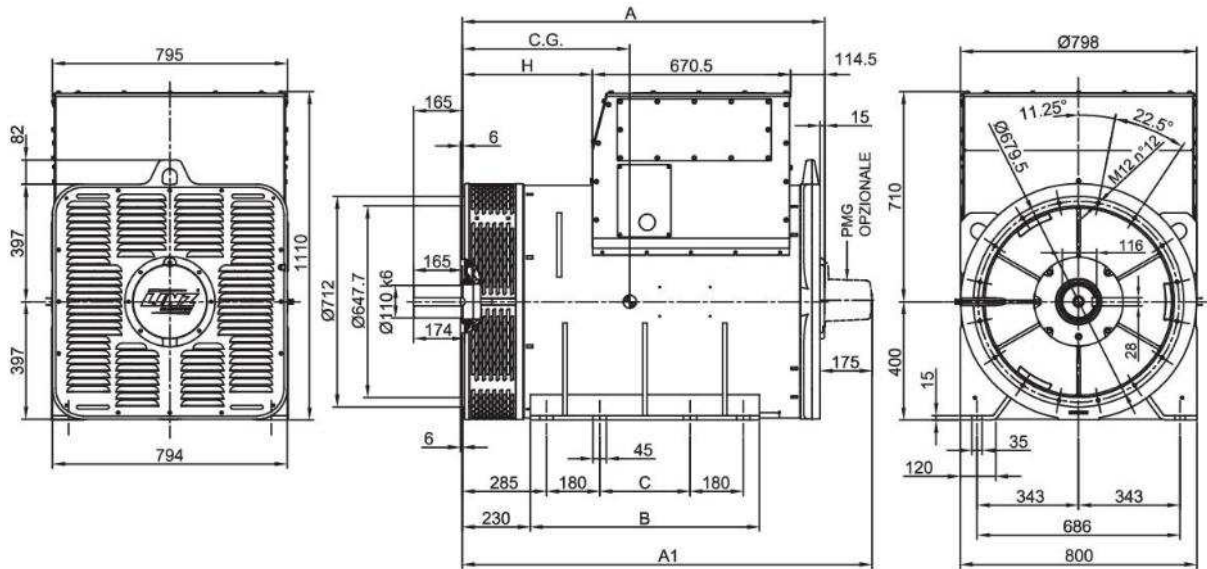

FORMA - FORM SAE

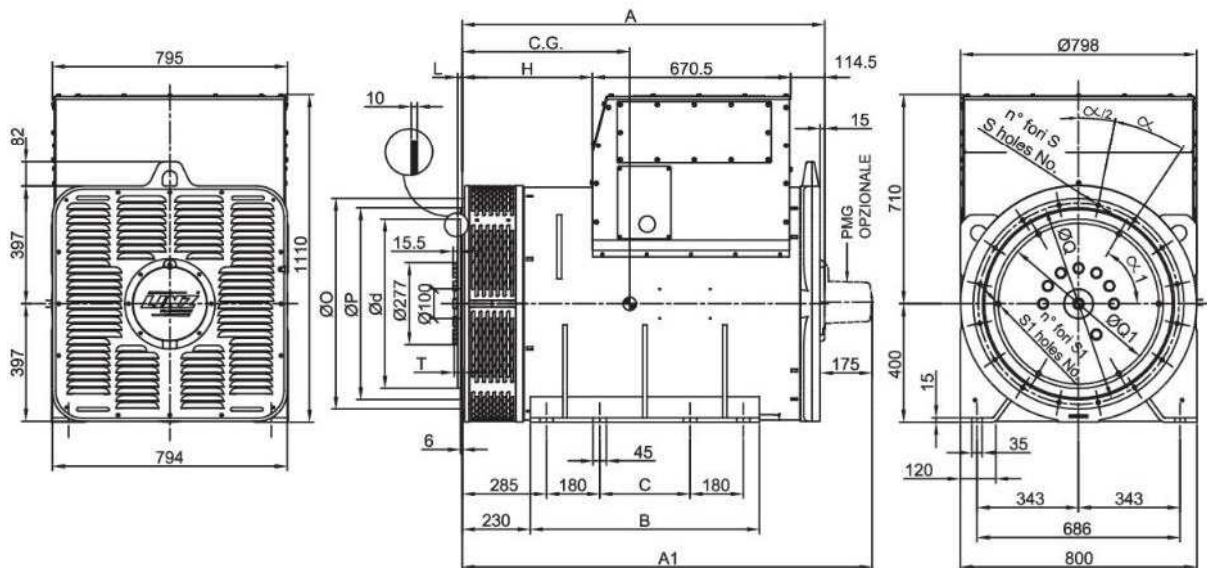

FORMA - FORM	A	H	A1	B	C	
B3/B14	PRO40 S	1225	440	1385	775	305
	PRO40 M	1420	635	1580	775	305
	PRO40 L	1625	840	1785	965	495
SAE	PRO40 S	1225	440	1385	775	305
	PRO40 M	1420	635	1580	775	305
	PRO40 L	1625	840	1785	965	495

TIPO - TYPE	C.G.
PRO40S A/4	597
PRO40S B/4	597
PRO40M C/4	648
PRO40M D/4	693
PRO40L E/4	795

SAE N.	FLANGIE - FLANGES - BRIDAS					
	ØO	ØP	ØQ	n. fori holes No.	S	α
OO	883	787.4	850.9	16	14	22.5°
O	710	647.7	679.5	16	14	22.5°

SAE N.	GIUNTI A DISCO - COUPLING DISCS - JUNTAS A DISCOS						
	L	Ød	ØQ1	n. fori holes No.	S1	α1	T
14	25.4	466.72	438.15	8	14	45°	2
18	15.7	571.5	542.92	6	17	60°	12
21	0	673.1	641.35	12	17	30°	28